



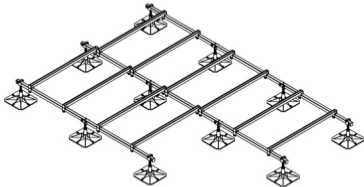

light


## flexi light - flexi frames

Modular bespoke frames for project specific requirements to support HVAC services



### Features & Benefits

- Non-penetrative support
- Flexible design to accommodate late design changes
- Fast and simple installation
- Hot dip galvanised frameworks
- Fully adjustable to roof falls
- No time consuming clamping kits required, cross bars are industry standard strut fix
- Full AutoCAD drawing support
- Load management and wind calculations available
- Full on-site support and surveying services
- Available with Grey circular feet or Black square options



365mm dia foot



320mm square foot



Pump House  
 Glaisdale Drive East  
 Nottingham  
 NG8 4LY  
 Tel: 0115 900 5858  
[www.flexisupportsystems.co.uk](http://www.flexisupportsystems.co.uk)  
[sales@flexisupportsystems.co.uk](mailto:sales@flexisupportsystems.co.uk)



everyday



heavy



access




solar




# flexi bespoke frames for building services

Flexi modular bespoke frames have been designed to offer complete solutions for mounting and supporting a wide range of air handling, air conditioning and refrigeration equipment that fall outside our standard frame range. The flexibility of the product enables us to provide a variety of solutions in length, widths or heights to accommodate all eventualities. Whether there is a step in the roof design, significant roof falls or irregular shaped building services that require complete support, a bespoke solution will be available. For heavier services please visit our 'flexi-heavy' range.

## Typical Bespoke Assembly

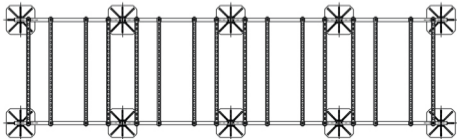

Our experienced in-house design team will assist you with your enquiry and propose a suitable solution. Utilising the latest industry AutoCAD software we provide working drawings to assist the project team with regards to setting out or for inclusion within specification packs should you require this. Free on-site support, which also includes a surveying service is also available upon request.



Part Code	Description	Length	Width	Height	Frame Mass	Max Load
PH-BF	Flexi - BASE FRAME	1200 mm	1200 mm	300-405 mm	30 kg	500 kg
PH-EF	Flexi - EXTENDER FRAME	1200 mm	1200 mm	300-405 mm	24 kg	500 kg
PH-BF-1500	Flexi - BASE FRAME 1500	1500 mm	1500 mm	300-405 mm	33 kg	500 kg
PH-EF-1500	Flexi - EXTENDER FRAME 1500	1500 mm	1500 mm	300-405 mm	27 kg	500 kg



## Specification Extract

External services will be supported on Pump House fully adjustable and hot dip galvanised flexi frames. Contact Tel: 0115 900 5858.

## Application

Support of irregular shaped building services, or where there are limitations due to space restrictions, existing obstacles etc. Industry strut cross bars slide to accommodate any air conditioning fixing feet centres and negate the requirements of time consuming clamping kits (as seen with some systems), as industry standards sprung nuts and strut cross bars provide a very fast install.

## Material Specification

- Foot - 365mm diameter or 320mm square UV stabilised 100% polypropylene
- Mat - 100% natural rubber, (mat is adhered to the foot)
- Legs - 48mm dia. 3mm steel tube with M24 stud adjuster and 3mm thick U-clevis to top
- End Bars - 40x40x3mm SHS (square hollow section)
- Cross bars - 41x41x2.5mm slotted stud with adjustable end clamps
- Finish - Hot dip galvanised steelwork BS EN 102191:1997. Galvanising: BS EN ISO 1461:1999. Salt mist testing: BS EN 60068-2-52

## Our service offers you

- Quotation upon request
- Full AutoCAD drawings support
- Site support and site surveys
- Load management calculations
- 20 years experience in flat roof design and providing support systems to building services
- Fast delivery (FREE on large orders)
- Experienced in-house technical staff
- Friendly, family run business