

6

DATA

6-1. REFILLING REFRIGERANT CHARGE (R410A : kg)

Service Ref.	Piping length (one way)							Factory charged
	10m	20m	30m	40m	50m	60m	70m	
PUHZ-P200YHA PUHZ-P200YHA3	4.8	5.3	5.8	6.7	7.6	8.5	9.4	5.8
PUHZ-P250YHA PUHZ-P250YHA3	5.9	6.5	7.1	8.3	9.5	10.7	11.9	7.1


For pipe longer than 30m, additional charge is required.

6-2. COMPRESSOR TECHNICAL DATA

(at 20°C)

Unit		PUHZ-P200, 250YHA	PUHZ-P200, 250YHA3
Compressor model		ANB52FFJMT ANB52FFPMT	ANB52FFPMT
Winding Resistance (Ω)	U-V	0.30	0.30
	U-W	0.30	0.30
	W-V	0.30	0.30

6-3. NOISE CRITERION CURVES

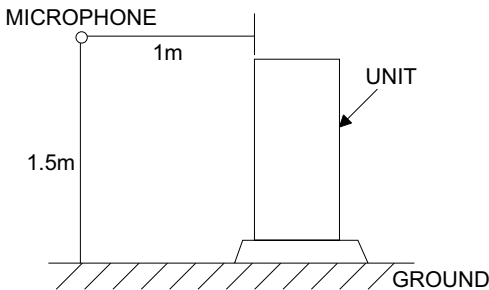

PUHZ-P200YHA
PUHZ-P250YHA
PUHZ-P200YHA3
PUHZ-P250YHA3

MODE	SPL(dB)	LINE
COOLING	59	○—○
HEATING	59	●—●

